

PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference 53863-57240	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/SE99/02244	International filing date (<i>day month year</i>) 01.12.1999	Priority date (<i>day month year</i>) 01.12.1998
International Patent Classification (IPC) or national classification and IPC ⁷ H04Q 11/04, 04 12/56		
Applicant Telefonaktiebolaget LM Ericsson (publ) et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 6 sheets, including this cover sheet.

☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of _____ sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☒ Certain documents cited
- VII ☒ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 29.06.2000	Date of completion of this report 28.03.2001
Name and mailing address of the IPEA/SE Patent- och registreringsverket Box 5055 S-102 42 STOCKHOLM Facsimile No. 08-667 72 88	Authorized officer Pär Heimdahl/LR Telephone No. 08-782 25 00

Form PCT/IPEA/409 (cover sheet) (January 1998)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE99/02244

I. Basis of the report

1. With regard to the elements of the international application:*

- ☒ the international application as originally filed
- ☐ the description:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the claims:
pages _____, as originally filed
pages _____, as amended (together with any statement) under article 19
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the drawings:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the sequence listing part of the description:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____

2. With regard to the language, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language _____ which is:

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages _____
- ☐ the claims, Nos. _____
- ☐ the drawings, sheet/fig _____

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2 (c)).**

* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

** Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE99/02244

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**1. Statement**

Novelty (N)	Claims	<u>1-20</u>	YES
	Claims		NO
Inventive step (IS)	Claims	<u>1-20</u>	YES
	Claims		NO
Industrial applicability (IA)	Claims	<u>1-20</u>	YES
	Claims		NO

2. Citations and explanations (Rule 70.7)**CITATIONS**

The examination process has revealed the following documents, which represent the general state of the art:

D1: US 5 297 144 A
D2: WO 98 44 758 A1
D3: US 5 677 909 A
D4: US 5 327 432 A

THE CLAIMED INVENTION

The claimed invention relates to a transmission delay control for media access control, which involves a consulting schedule to determine if scheduling interval is elapsed and allocating time slot with delay sensitive traffic service.

Network nodes are connected to central node over a shared medium by allocating time slots using a scheduler with pre-set scheduling interval, corresponding to time slots to assemble data packet of delay sensitive traffic service. Prior to time slot allocation, determination is done if a schedule interval has elapsed and to allot time slot with delay sensitive traffic service.

The invention thus provides a transmission delay controlling method for controlling media accessing.

STATEMENT

The document D1 discloses a reservation-based polling protocol for a wireless data communications network.

Document D2 presents a data transmission over a point-to-multipoint optical network.

.../...

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/PCT/SE99/02244

Supplemental Box

(To be used when the space in any of the preceding boxes is not sufficient)

Continuation of: V

CONCLUSION

The claimed invention according to patent claims 1-20 is considered to be new, to involve an inventive step and to be susceptible to industrial application.

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE99/02244

VI. Certain documents cited

1. Certain published documents (Rule 70.10)

Application No. Patent No.	Publication date (day month year)	Filing date (day month year)	Priority date (valid claim) (day month year)
WO 98 54 858	03/12/1998	25/03/1998	30/05/1997

2. Non-written disclosures (Rule 70.9)

Kind of non-written disclosure	Date of non-written disclosure (day month year)	Date of written disclosure referring to non-written disclosure (day month year)
--------------------------------	--	---

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE99/02244

VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:


Dependent patent claim 18, concerning a network, refers to independent claim 17, concerning a node. This defect ought to be corrected.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04Q 11/04, H04L 12/56	A1	(11) International Publication Number: WO 00/33609 (43) International Publication Date: 8 June 2000 (08.06.00)
<p>(21) International Application Number: PCT/SE99/02244</p> <p>(22) International Filing Date: 1 December 1999 (01.12.99)</p> <p>(30) Priority Data: 9804172-6 1 December 1998 (01.12.98) SE</p> <p>(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; SE-126 25 Stockholm (SE).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): LANDBERG, Christer [SE/SE]; Vädursvägen 1A, S-141 33 Huddinge (SE). OL-GUS, Lars [SE/SE]; Skogsslingan 3, S-127 41 Skärholmen (SE).</p> <p>(74) Agents: JOHANSSON, L., E. et al.; Albihns Patentbyrå Stockholm AB, P.O. Box 5581, S-114 85 Stockholm (SE).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: AN ACCESS CONTROL MECHANISM FOR PACKET SWITCHED COMMUNICATION NETWORKS

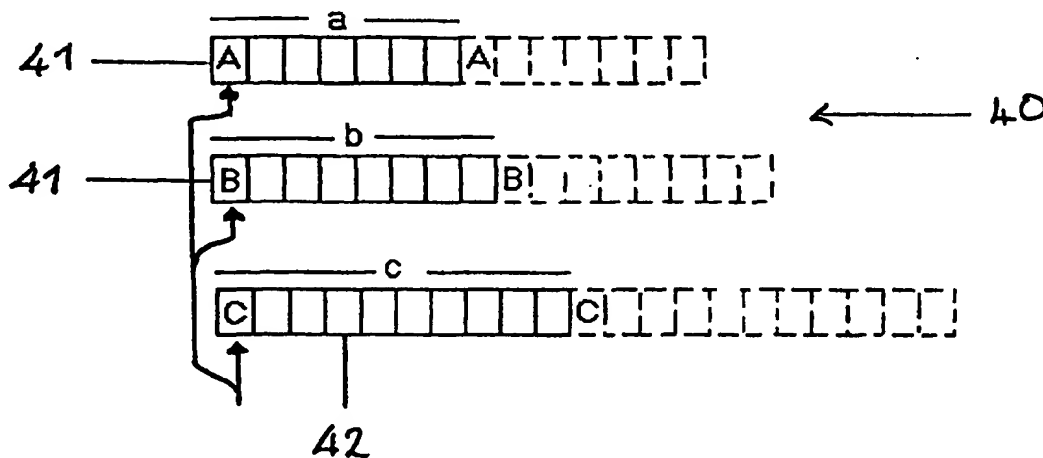

(57) Abstract

In a point-to-multipoint link traffic is transmitted in packets across the shared medium. Access to the medium is controlled by permits sent by a central node to multipoint nodes in response to a queue record of the number of packets awaiting transmission at the multipoint nodes. When circuit emulated traffic, or traffic with tight delay and delay variation requirements, is to be sent across the link, permits are sent by the central node unsolicited at regular intervals in accordance with information stored in a scheduler. The scheduler may be a single or several circular memories comprising cells representing time slots on the link. The cells contain scheduling information corresponding to one or more multipoint nodes. The central node consults the scheduler to determine if a permit is scheduled. If no permit is scheduled the time slot may be allocated to an unscheduled service on the basis of a queue record.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

An access control mechanism for packet switched communication networks

1. Field of invention

5 The invention relates to media access control (MAC) over a shared multiplexed link using packet transmission. It is particularly directed to the management of the transfer of information from services which stipulate certain delays and delay variations, such as circuit emulated traffic, in a packet switched network, and specifically between a central node and one of several
10 multipoint nodes over a shared medium.

2. Background art

Media access control (MAC) in a packet switched network is a mechanism for
15 determining which of a plurality of nodes is allowed to send information over a shared medium. In a point-to-multipoint configuration it is common that the head end or central node in a shared link will control the utilisation of the link by multipoint nodes. This is achieved by polling the various multipoint nodes. The polling order and frequency is generally controlled according to traffic
20 demand. In a time division multiplexed TDM link, time slots are allocated by the head end of a link in response to requests sent by the multipoint nodes when traffic is awaiting transmission at these node. The slots are allocated using permits that designate which time slot in the future traffic stream may be utilised for which service traffic. When more traffic is waiting than there are
25 available time slots, the central node will issue queuing and prioritising requests to determine which service should be allocated channel capacity first, and which can wait.

Packet switched networks are increasingly utilised to transport a variety of traffic, some of which is traditionally circuit switched. An example of this is the transmission of voice over an internet protocol (IP) based network. While speech information may be packetised, certain transmission delays and delay variations must be respected if the speech service is to be acceptable to the end user. This is a general requirement of all circuit emulated traffic. Accordingly, with the above-described request based protocols, a multipoint node carrying circuit emulated traffic requires permits to be allocated without delay and with high priority. When more than one delay sensitive service utilises the shared medium the access control becomes more complex. This situation is made still more difficult when the delay sensitive services use different frame lengths and possibly also different bit rates so that intervals between the required high priority permits are always changing. The result is often excessive delays in one or more of the delay sensitive services leading to the end user experiencing an unacceptable quality of service.

SUMMARY OF INVENTION

It is therefore an object of the invention to provide a method and arrangement enabling the efficient handling of hybrid traffic over a shared multiplexed link.

It is a further object of the present invention to provide a method and arrangement enabling the handling of several delay sensitive services over a shared medium in a packet switched network.

These and further objects are achieved in a method and arrangement for controlling access to a central node over shared medium by one of several network nodes carrying both delay sensitive and non-delay sensitive traffic, by

providing a scheduler that defines a predetermined scheduling interval for the delay sensitive traffic services. The scheduling interval corresponding essentially to the time in terms of time slots for assembling a data packet of the delay sensitive traffic service. Prior to allocating a time slot, the central node consults the scheduler to determine if a scheduling interval has elapsed. If an interval has elapsed, a time slot is allocating to the network node carrying the corresponding delay sensitive traffic service. If no scheduling interval has elapsed for the time slot consulted, the central node allocates a time slot to a non-delay sensitive service on the basis of stored information concerning the amount of traffic awaiting transmission at the various network nodes.

The scheduler is a cyclical storage means that is divided into cells representing a time slot on the shared medium and adapted to contain scheduling information relating to the traffic service.

The scheduler may comprise scheduling information for several services in a single cyclical storage means. Alternatively the scheduler contains several separate, cyclical schedulers arranged in a queue, and each being dedicated to a single traffic service.

With this method and arrangement, the transmission efficiency across the shared link can be substantially improved because no exchange of queue information is necessary for the scheduled services. Furthermore, the delays and delay variations experienced by circuit emulated and other delay sensitive traffic can be kept at a minimum. By using multiple cyclical storage means, one dedicated to each service, both the implementation of the scheduler and its expansion to accommodate additional delay sensitive services is rendered exceptionally simple.

BRIEF DESCRIPTION OF THE DRAWINGS

Further objects and advantages of the present invention will become apparent from the following description of the preferred embodiments that are given by way of example with reference to the accompanying drawings, in which:

Fig. 1 schematically depicts a point to multipoint link of a multiplexed packet switched network,

Fig. 2 shows a first embodiment of a scheduler according to the invention, and

Fig. 3 shows a further embodiment of a scheduler according to the invention.

DETAILED DESCRIPTION OF THE DRAWINGS

A typical multipoint-to-point link in a TDMA packet switched communication network is illustrated in Fig. 1. Several multipoint nodes 20 communicate via a single, shared bi-directional channel with a central node 10. Only three nodes are shown in the figure, however it is to be understood that further nodes may be connected above and below the illustrated nodes. The channel 100 may be a fixed electrical or electro-optical link or an air interface.

As in many conventional media access control (MAC) protocols, the central node 10 determines which time slots on the shared channel 100 will be allocated to which services conveyed by the multipoint nodes 20. This is accomplished by the central node 10 issuing permits for a time slot in the future information stream.

For delay insensitive packet switched services, such as data transmission services, the central node 10 holds a record of the number of packets of information awaiting transmission at each of the multipoint nodes 20. This is represented in the figure by a queue record memory 11. The queue records are updated by means of permit requests, or equivalent queue size reports, sent by the multipoint nodes 20 to the central node 10. When the record of a particular multipoint node 20 indicates that packets are awaiting transmission, the central node 10 issues a corresponding permit defining which time slot the multipoint node 20 in question may utilise for transmitting the packet. When more packets are awaiting transmission than can be dealt with immediately, the central node 10 determines which service has priority. This prioritising information is likewise obtained from the multipoint nodes 20 on invitation from the central node 10.

In the present example, however, it is assumed that the traffic A, B, C conveyed by the three illustrated multipoint nodes 20 is delay sensitive, i.e. has strict requirements as to allowable delays and delay variations. This may include, but is not limited to, circuit emulated traffic, voice or interactive video traffic. Furthermore, each service A, B, C has different frame lengths.

In accordance with the present invention, these services are not handled in the same way as delay insensitive services. While the central node 10 issues permits to the services A, B, C, these are not issued in response to information obtained from the multipoint nodes 20, but are instead scheduled by the central node 10 at regular intervals. In other words, no exchange of information takes place between the nodes. The issuing of permits is unsolicited. This is performed in accordance with the present invention with the aid of a scheduler.

Fig. 2 shows a scheduler 30 according to a first embodiment of the invention. The scheduler 30 can be viewed as a circular memory divided into cells 31, each of which represents a time slot on the shared channel. It will be understood, however, that the scheduler 30 may be implemented using one or more modulo counters, memories or registers with pointers, or similar means which allow information to be obtained at predetermined regular intervals. The scheduler 30 is either incorporated in the central node 10 or is arranged such that a controller of the central node 10 (not shown) that is adapted to handle the allocation of time slots across the shared link can easily access the scheduler 30.

Prior to operation, or upon the introduction of a new delay sensitive service, the scheduler 30 is programmed. This may be done by the central node 10 using its controller, or may be performed using external means. The scheduler 30 in Fig. 2 is already programmed with markers in some of the cells 31 that serve to indicate which service is to be allocated a permit for which time slot in the future traffic stream. In the present example these markers are represented by the letters A, B and C for the three delay sensitive services of the same names, respectively. The scheduler 30 does not define the slot as an absolute time, but rather the slot interval. The different services, A, B and C, have different frame formats and lengths determined by the transmission bit rate and denoted in the figure by a, b and c, respectively. In the figure, the frame length a of the service A is given as the equivalent of 7 time slots on the shared channel; the frame length b of service B is 8 time slots, and the frame length c of the service C is 11 time slots. In order that the permit intervals for each of these services can be respected, the total length of the scheduler 30 is a multiple of all the frame lengths in terms of time slots. While the scheduler 30 illustrated in Fig. 2 is somewhat truncated, it is assumed to have a length equal to the smallest multiple of a, b and c, that is 616 cells 31. It will be understood

that the permit intervals between different services will also take account of possible path delay differences between the various multipoint nodes 20 and the central node 10.

5 In operation, the central node 10, or its controller, consults the cells 31 of scheduler 30 in succession to determine whether a permit is scheduled for one of the services A, B or C for each time slot. If the cell 31 consulted is marked, a permit will be issued to the corresponding multipoint node 20 carrying the selected service. If no permit is scheduled for a particular time slot, the central
10 node 10 may issue a permit to one of the other delay insensitive services which require access to the shared medium on the basis of queue size information stored at the node 10, as described above. Once all the cells 31 of the scheduler 30 have been consulted in turn, the pointer or its equivalent returns to the beginning again.

15 It will be apparent that when services with different frame formats and lengths are to be scheduled at predetermined constant intervals over the same link, there will be incidences when permits for two or more different services will be scheduled in the same time slot. In this case, the central node 10, or rather
20 its controller, will allocate the time slot to one of the services and cause the frames for the remaining services to be delayed by one or more time slots. The allocation of time slots for conflicting permit schedules may be decided on the basis of prioritising information relating to the services, whereby one service will consistently be handled before the others. Alternatively, the central node
25 10 may treat all services with equal priority by giving one service priority in the first incidence of conflict and another service priority in the next incidence. Alternatively, the scheduler 30 could be programmed such that only one permit is allocated to each cell, however this would necessarily introduce a firm priority for one or other of the services.

The scheduler 30 described with reference to Fig. 2 can deal efficiently with the access of circuit emulated delay sensitive traffic over a shared link of a packet switched network when the number of services with different frame lengths is not too high. However, when several different services, many with different frame lengths are to be scheduled on a shared medium, the length of the scheduler will become prohibitively large. Furthermore the scheduler 30 of Fig. 2 does not lend itself easily to expansion. It is complex to incorporate additional services, since new permit schedules will effect both the total length and the content of the scheduler 30.

This problem is overcome by the scheduler 40 illustrated in Fig. 3 according to a second embodiment of the invention.

In place of the single circular memory of the first embodiment of the invention, this scheduler 40 includes several short schedule memories 41 arranged in a queue. Each schedule memory 41 contains information for services having the same frame format and length. In Fig. 3 the topmost schedule memory 41 contains scheduling information for the service A, the next schedule memory 41 in descending order contains information relating to service B, and the final schedule memory 41 contains permit scheduling information for service C. The maximum length required for this scheduler is thus $a+b+c$ cells 42. Furthermore, since several services could be scheduled using each single queue, provided they have the same frame length the total length of the scheduler will not change. The cells 42 of each schedule memory 41 represent coincident time slots. As indicated by the arrows in Fig. 3, the central node 10, or its controller, thus consults the cells 42 of each of the schedule memories 41 representing the current time slot in turn, and determines which, if any, of the services is to be sent a permit for the specified

time slot.

As for the scheduler structure 30 of the first embodiment, some conflict is inevitable between the scheduled permits. Accordingly, when permit
5 allocation markers are present in more than one cell 42 representing the current time slot, the central node controller will decide which service will be handled preferentially. This is done on the basis of prioritising information obtained previously from the corresponding multipoint nodes 20.

Alternatively, when no service is defined as having priority, or all services
10 stipulate similar delays and delay variations to be respected, priority will be allocated by the central node controller to each service in turn as each conflict arises. Also, as for the previous embodiment, the schedule memories 40 may be programmed with a specified priority hierarchy causing some services to be consistently delayed in favour of another so that decisions do not need to be
15 made by the central node 10, or its controller.

The scheduling of the transmission of some delay sensitive services over a shared link in a packet switched network in the manner described above can lead to good efficiency and allow the delays and delay variations to be kept
20 small. However, the delays and delay variations can be reduced still further if the scheduling of a service is arranged to correspond with the assembly of cells. Circuit emulated traffic transmitted over a packet switched network may use only part of a cell for traffic information so as to reduce the time needed for assembly of the cell. For example, to reduce the time needed to assemble
25 an ATM cell for a 64kbps telephone service, the ATM cell may contain only 24 bytes of traffic information with the 24 remaining bytes being filled with dummy data. The delay experienced by this service can be substantially reduced, when the scheduling of packet transmission using the scheduler 30, 40 described above is synchronised to coincide with the assembly of the cell

after the arrival of 24 bytes of information. Furthermore, the permits may be scheduled to prevent time slots being wasted on the transmission of idle or dummy cells or cell portions.

Claims:

1. A method of controlling the transmission of delay sensitive and non-delay sensitive traffic from a plurality of network nodes (20) to a
5 central node (10) over a shared medium (100), wherein time slots for transmission over said shared medium (100) are allocated by said central node (10) to the network nodes (20), characterised by providing a scheduler (30, 40) defining a predetermined scheduling interval for at least one delay sensitive traffic service, said scheduling
10 interval corresponding essentially to the time in terms of time slots for assembling a data packet of the delay sensitive traffic service, prior to allocating a time slot, consulting said scheduler (30, 40) to determine if a scheduling interval has elapsed, and allocating said time slot to a network node (20) carrying a delay
15 sensitive traffic service if said scheduler indicates that the predetermined interval for the delay sensitive traffic service has elapsed.
2. A method as claimed in claim 1, characterised by
20 for each delay sensitive traffic service, adapting the predetermined scheduling interval to the frame length of the traffic service.
3. A method as claimed in claim 1 or 2, characterised by allocating said
25 time slot to a further network node (20) carrying a non-delay sensitive service on the basis of stored information concerning non-delay sensitive traffic awaiting transmission if the scheduler (30, 40) indicates that no scheduling interval has elapsed.
4. A method as claimed in any previous claim, characterised by

determining from said scheduler (30, 40) if the scheduling interval for more than one traffic service has elapsed, and allocating consecutive time slots to the scheduled traffic services with alternating priority.

- 5 5. A method of controlling the transmission of delay sensitive and non-delay sensitive traffic from a plurality of network nodes (20) to a central node (10) over a shared medium (100), wherein traffic is transmitted from said network nodes (20) to said central node (10) in time slots in response to permits issued to said network nodes by said
- 10 central node characterised by
- providing a scheduler defining a predetermined scheduling interval for at least one delay sensitive traffic service,
- prior to issuing a permit, consulting said scheduler to determine if a predetermined scheduling interval has elapsed,
- 15 if at least one interval has elapsed, issuing a permit enabling transmission during a future time slot to a network node (20) carrying a delay sensitive traffic service, and
- if no interval has elapsed, issuing a permit enabling transmission during said future time slot to a further network node (20) carrying a non-delay
- 20 sensitive service on the basis of stored information relating to non-delay sensitive traffic awaiting transmission.
6. A packet switched communication network including a central node (10) and a plurality of network nodes (20) connected to said central
- 25 node (10) by a shared medium (100), wherein data is transmitted from said network nodes (20) to said central node (10) over said shared medium in time slots allocated by said central node, characterised by scheduling means (30, 40) for storing scheduling intervals relating to delay sensitive traffic services carried by at least one network node,

wherein said stored scheduling intervals correspond essentially to the time in terms of time slots for assembling a data packet of the traffic service, and

means in said central node (10) for consulting said scheduling means to determine whether a scheduling interval has elapsed and for allocating a time slot to a network node (20) carrying a delay sensitive traffic service if a scheduling interval relating to said traffic service has elapsed.

- 10 7. A network as claimed in claim 6, characterised in that said scheduling means (30, 40) includes a plurality of storage cells (31,42) each cell corresponding to a transmission time slot on said shared medium and being programmable with a marker corresponding to a delay sensitive traffic service.
- 15 8. A network as claimed in claim 7, characterised in that the cells (31, 41) in said scheduling means (30, 40) are sequentially accessible.
- 20 9. A network as claimed in claim 7 or 8, characterised in that the cells of the scheduling means are accessed cyclically.
- 25 10. A network as claimed in any one of claims 7 to 9, characterised in that the number of cells included in said scheduling means (30) is at least equal to the multiple of the scheduling intervals in terms of time slots of the scheduled traffic.
11. A network as claimed in any one of claims 7 to 9, characterised in that said scheduling means (40) comprises several cyclical schedulers (41), wherein each cyclical scheduler (41) is programmed with scheduling

markers relating to traffic services having the same scheduling interval in terms of time slots, the cells of each scheduler corresponding to the same time slot being accessible in turn.

- 5 12. A network as claimed in claim 11, characterised in that each scheduler (41) has a length in cells (42) that is equal to the scheduling interval in terms of time slots of the scheduled traffic services.
- 10 13. A network as claimed in any one of claims 6 to 12, characterised in that said central node (10) comprises queue recording means (11) for storing the packet queue size of non-delay sensitive traffic awaiting transmission at said network nodes (20).
- 15 14. A packet switched communication network including a central node (10) and a plurality of network nodes (20) connected to said central node (10) by a shared medium (100), wherein payload information is transmitted from said network nodes (20) to said central node (10) over said shared medium in time slots allocated by said central node, characterised by
- 20 scheduling means (30, 40) including plurality of storage cells (31,42) each cell corresponding to a transmission time slot on said shared medium and being programmed with markers corresponding to at least one delay sensitive traffic services carried by at least one network node, the number of cells separating a marker for the same traffic service
- 25 corresponding essentially to the time in terms of time slots for assembling a data packet of the traffic service, and means in said central node (10) for sequentially consulting the cells of said scheduling means to determine if a marker designating a delay sensitive traffic service is present and for allocating a time slot to a

network node (20) carrying a delay sensitive traffic service if a marker corresponding to said traffic service is present in a consulted cell.

- 5 15. A packet switched communication network including a central node (10) and a plurality of network nodes (20) connected to said central node (10) by a shared medium (100), wherein payload information is transmitted from said network nodes (20) to said central node (10) over said shared medium in time slots allocated by said central node, characterised by
- 10 scheduling means (30, 40) including a plurality of cyclical storage means (41), wherein each storage means (41) includes a plurality of storage cells (31,42) each corresponding to a transmission time slot on said shared medium, each storage means further being programmed with scheduling markers relating to delay sensitive traffic services that
- 15 are carried by at least one network node (20) and have the same frame length in terms of time slots, and means in said central node (10) for consulting the cells (31, 42) of each scheduler corresponding to the same time slot in turn to determine if a marker designating a delay sensitive traffic service is present and for allocating a time slot to a
- 20 network node (20) carrying a delay sensitive traffic service if a marker corresponding to said traffic service is present in a consulted cell.
- 25 16. A node in a packet switched communication network for controlling the transmission of data from a plurality of network nodes (20) over a shared medium (100) by allocating transmission time slots to said network nodes (20), said node being characterised by means (30, 40) for storing scheduling intervals relating to delay sensitive traffic services carried by at least one network node (20), the scheduling interval for each traffic service corresponding essentially to

the time in terms of time slots for assembling a data packet of the traffic service,

means (11) for recording the number of packets of non-delay sensitive traffic awaiting transmission at said network nodes (20) and

5 a controller for consulting said scheduling means to determine whether a scheduling interval has elapsed and for allocating a time slot to a network node (20) carrying a delay sensitive traffic service if a scheduling interval relating to said traffic service has elapsed or for allocating a time slot to a network node (20) carrying non-delay
10 sensitive traffic selected on the basis of the number of packets awaiting transmission if no scheduling interval has elapsed.

17. A node in a packet switched communication network for controlling the transmission of data from a plurality of network nodes (20) over a
15 shared medium (100) by allocating transmission time slots to said network nodes (20), said node being characterised by scheduling means (30, 40) including plurality of storage cells (31,42) each cell corresponding to a transmission time slot on said shared medium and being programmable with a marker corresponding to a
20 delay sensitive traffic service carried by at least one network node, the number of cells separating a marker for the same traffic service corresponding essentially to the time in terms of time slots for assembling a data packet of the traffic service, and means for sequentially consulting the cells of said scheduling means to
25 determine if a marker designating a delay sensitive traffic service is present and for allocating a time slot to a network node (20) carrying a delay sensitive traffic service if a marker corresponding to said traffic service is present in a consulted cell.

18. A network as claimed in claim 17, characterised in that the number of cells (31) included in said scheduling means (30) is at least equal to the multiple of the frame lengths in terms of time slots of the scheduled traffic.

5

19. A node in a packet switched communication network for controlling the transmission of data from a plurality of network nodes (20) over a shared medium (100) by allocating transmission time slots to said network nodes (20), said node being characterised by scheduling means (30, 40) including a plurality of cyclical storage means (41), wherein each storage means (41) includes a plurality of storage cells (31,42) each corresponding to a transmission time slot on said shared medium, each storage means further being programmed with scheduling markers relating to delay sensitive traffic services that are carried by at least one network node (20) and have the same frame length in terms of time slots, and means in said central node (10) for consulting the cells (42) of each scheduler corresponding to the same time slot in turn to determine if a marker designating a delay sensitive traffic service is present and for allocating a time slot to a network node (20) carrying a delay sensitive traffic service if a marker corresponding to said traffic service is present in a consulted cell.

10

15

20

20. A node as claimed in claim 19, characterised in that the number of cells (41) separating a marker for the same traffic service corresponds essentially to the time in terms of time slots for assembling a data packet of the traffic service at the network node (20).

25

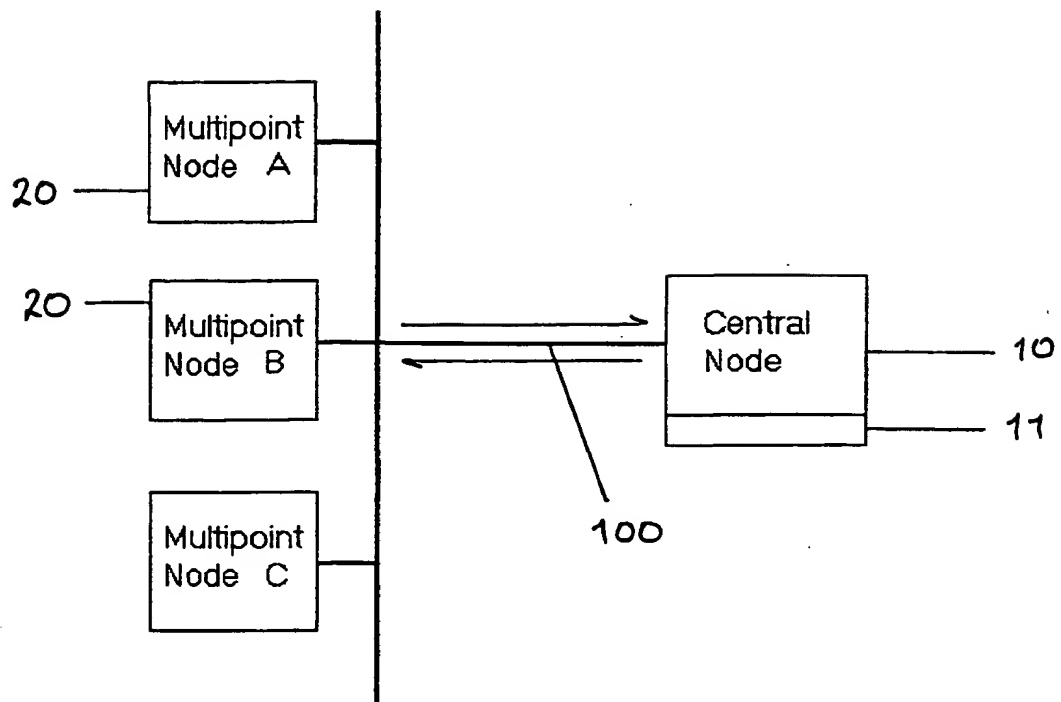


Fig. 1

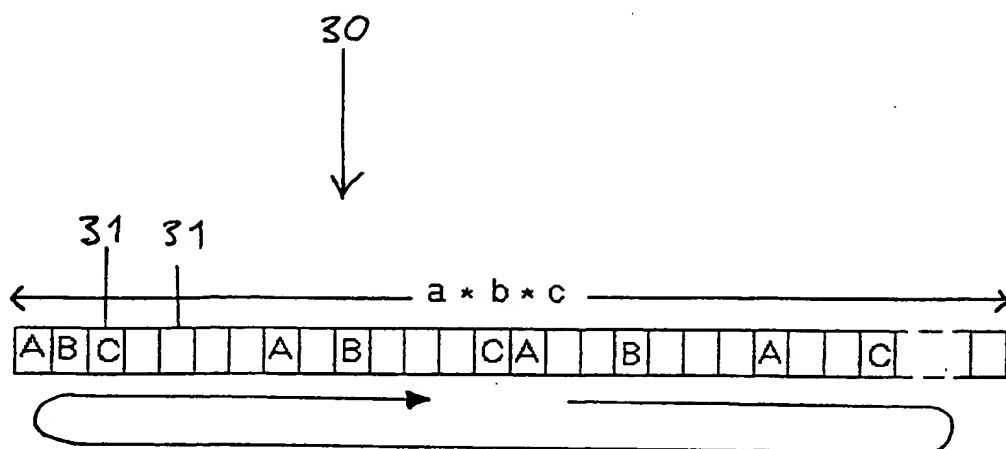


Fig. 2

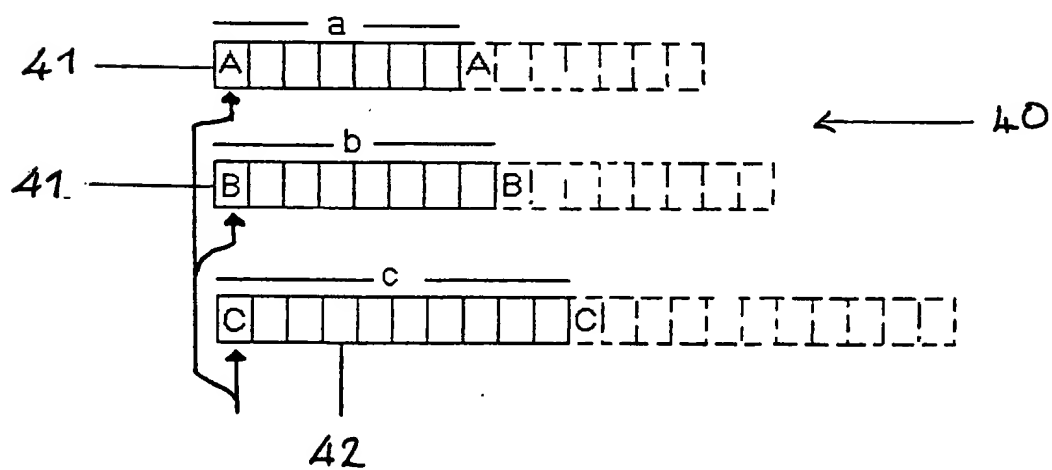


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 99/02244

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 11/04, H04L 12/56
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04L, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5297144 A (Sheldon L. Gilbert et al.) 22 March 1994 (22.03.1994), column 1, line 53 - column 3, line 6; column 3, line 66 - column 4, line 5; column 7, line 18 - column 8, line 57; column 12, line 12 - line 19; figures 1 - 8; claims 1, 6; abstract --	1-20
A	WO 9844758 A1 (ERICSSON, INC.), 8 October 1998 (08.10.98), page 3, line 1 - page 5, line 11; page 10, line 1 - line 17; page 13, line 9 - line 24, claims 12-17, abstract, page 20, line 9 - line 26 --	1-20

☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 25 April 2000	Date of mailing of the international search report 28 -04- 2000
Name and mailing address of the ISA Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Johanna Lindqvist/LR Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 99/02244

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5677909 A (CAROLYN HEIDE), 14 October 1997 (14.10.97), column 1, line 51 - column 4, line 3; column 7, line 25 - line 42; column 8, line 21 - column 10, line 50, claims 1,2,5, abstract --	1-20
P,A	WO 9854858 A1 (MOTOROLA INC.); 3 December 1998 (03.12.98), page 2, line 24 - page 5, line 19; page 8, line 1 - page 9, line 4; page 9, line 28 - page 11, line 15, claims 1-3,13,38, abstract --	1-20
A	US 5327432 A (TARIF ZEIN AL ABEDEEN ET AL.), 5 July 1994 (05.07.94), claims 1-12, abstract -- -----	1-20

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/12/99

International application No.
PCT/SE 99/02244

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9844758	A1	08/10/98	AU	6871198 A	22/10/98
				US	5926478 A	20/07/99

US	5677909	A	14/10/97	CA	2189957 A	30/11/95
				EP	0759239 A	26/02/97
				JP	10508160 T	04/08/98
				WO	9532567 A	30/11/95

WO	9854858	A1	03/12/98	AU	6581698 A	30/12/98
				CN	1228217 T	08/09/99
				DE	19880884 T	11/11/99
				GB	2330278 A	14/04/99
				US	5886993 A	23/03/99

US	5327432	A	05/07/94	DE	69118157 D,T	05/09/96
				EP	0494564 A,B	15/07/92
				FR	2671251 A,B	03/07/92
				JP	7015382 A	17/01/95
